

# Y65KPM

## PHASE CONTROL THYRISTOR


**Features:**

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

**Typical Applications**

- AC controllers
- DC and AC motor control
- Controlled rectifiers

$I_{T(AV)}$  **1471A**  
 $V_{DRM}/V_{RRM}$  **4300~5500V**  
 $I_{TSM}$  **17.7 KA**  
 $I^2t$  **1566 10<sup>3</sup>A<sup>2</sup>S**

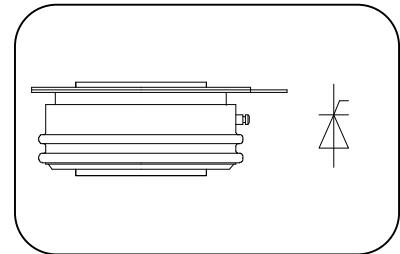

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_f$ (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$	Mean on-state current	180° half sine wave 50Hz Double side cooled, $T_{hs}=55^\circ C$	125			<b>1471</b>	<b>A</b>
$V_{DRM}$ $V_{RRM}$	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$ tp=10ms $V_{DSM} \& V_{RSM} = V_{DRM} \& V_{RRM} + 100V$	125	<b>4300</b>		<b>5500</b>	<b>V</b>
$I_{DRM}$ $I_{RRM}$	Repetitive peak current	$V_{DM} = V_{DRM}$ $V_{RM} = V_{RRM}$	125			<b>120</b>	<b>mA</b>
$I_{TSM}$	Surge on-state current	10ms half sine wave	125			<b>17.7</b>	<b>KA</b>
$I^2t$	$I^2T$ for fusing coordination	$V_R=0.6V_{RRM}$				<b>1566</b>	$A^2s \times 10^3$
$V_{TO}$	Threshold voltage		125			<b>1.30</b>	<b>V</b>
$r_T$	On-state slop resistance					<b>0.58</b>	<b>mW</b>
$V_{TM}$	Peak on-state voltage	$I_{TM}=3000A$ , $F=31KN$	125			<b>3.04</b>	<b>V</b>
$dv/dt$	Critical rate of rise of off-state voltage	$V_{DM}=0.67V_{DRM}$	125			<b>800</b>	$V/\mu s$
$di/dt$	Critical rate of rise of on-state current	$V_{DM}=67\%V_{DRM}$ to 3000A, Gate source 1.5A $t_r \leq 0.5 \mu s$ Repetitive	125			<b>200</b>	$A/\mu s$
$I_{rm}$	Reverse recovery current		125			<b>250</b>	<b>A</b>
$t_{rr}$	Reverse recovery time	$I_{TM}=1500A$ , tp=1000μs, $di/dt=-20A/\mu s$ , $V_R=50V$				<b>21</b>	$\mu s$
$Q_{rr}$	Recovery charge					<b>2100</b>	$\mu C$
$I_{GT}$	Gate trigger current		25	<b>40</b>		<b>300</b>	<b>mA</b>
$V_{GT}$	Gate trigger voltage	$V_A=12V$ , $I_A=1A$		<b>0.8</b>		<b>3.0</b>	<b>V</b>
$I_H$	Holding current			<b>20</b>		<b>250</b>	<b>mA</b>
$V_{GD}$	Non-trigger gate voltage	$V_{DM}=67\%V_{DRM}$	125	<b>0.3</b>			<b>V</b>
$R_{th(j-h)}$	Thermal resistance Junction to heat sink	At 180° sine double side cooled Clamping force 32KN				<b>0.014</b>	$^\circ C / W$
$F_m$	Mounting force			<b>27</b>		<b>34</b>	<b>KN</b>
$T_{stg}$	Stored temperature			<b>-40</b>		<b>140</b>	$^\circ C$
$W_t$	Weight					<b>650</b>	<b>g</b>
Outline				<b>KT60cT65</b>			

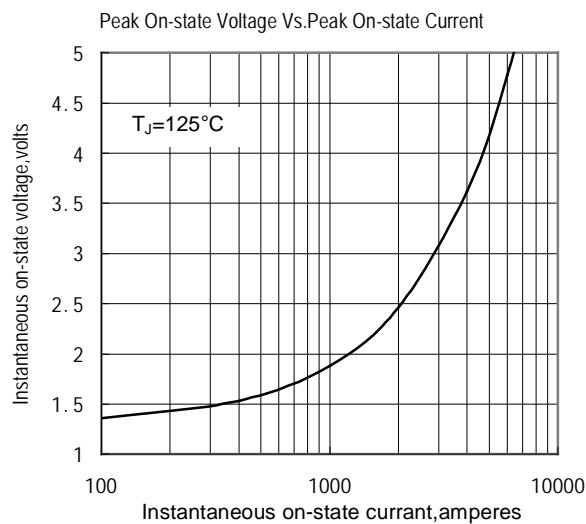


Fig.1

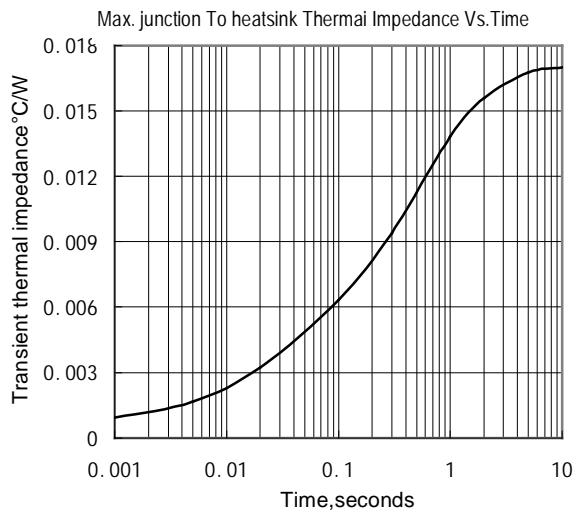


Fig.2

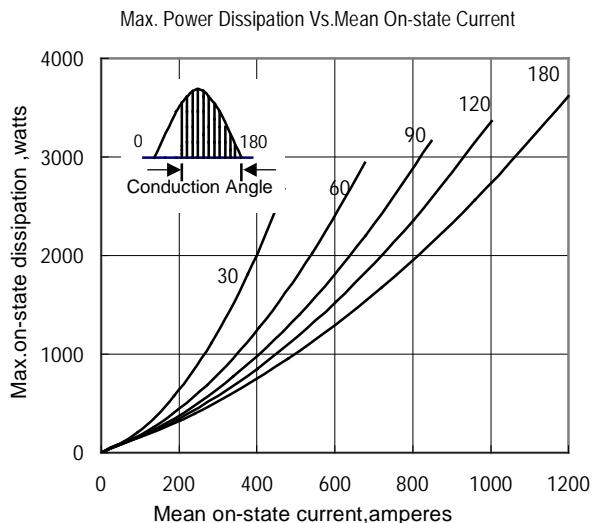


Fig.3

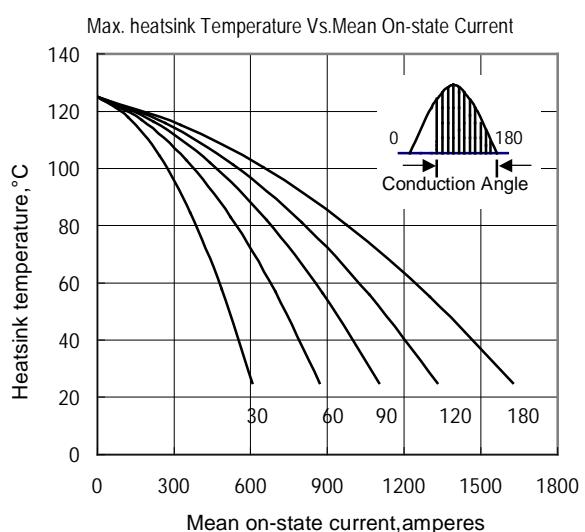


Fig.4

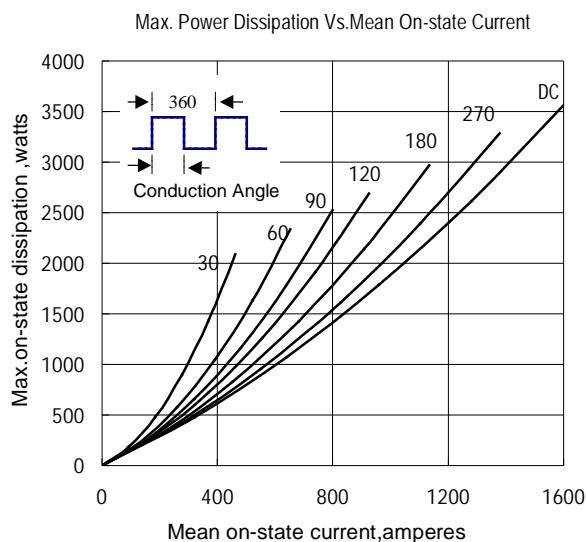


Fig.5

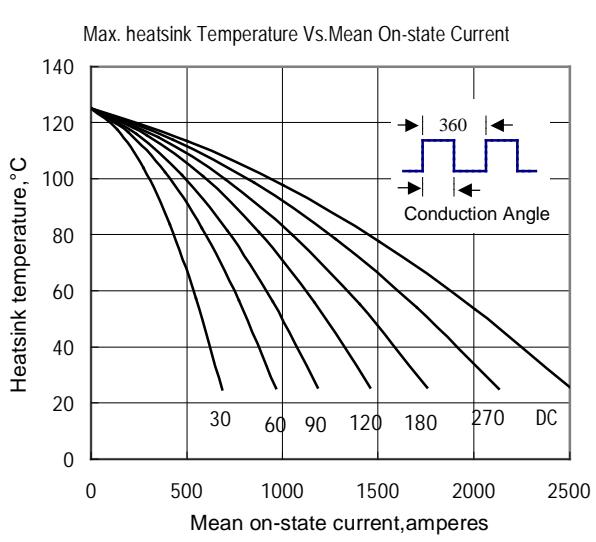


Fig.6

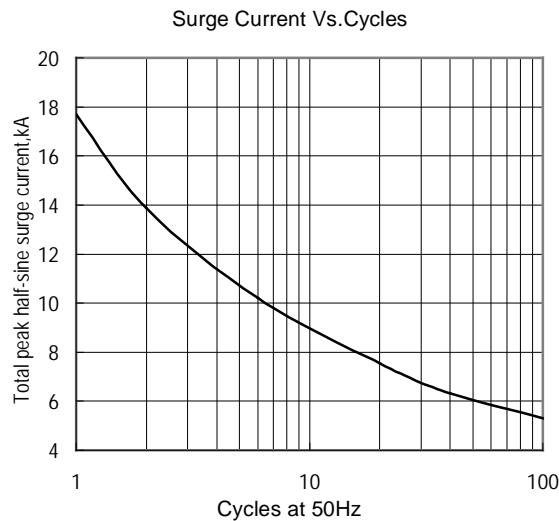


Fig.7

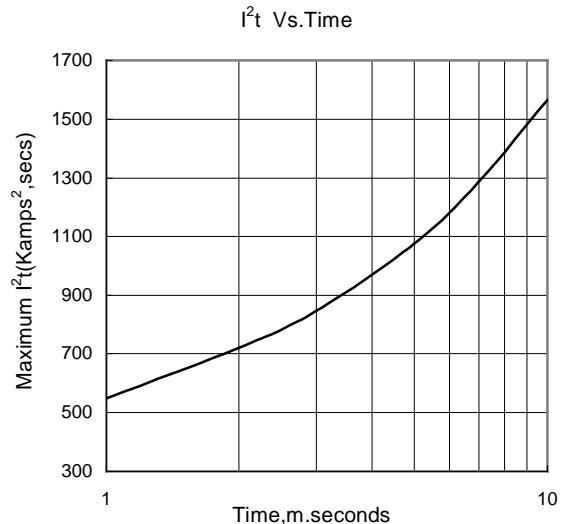


Fig.8

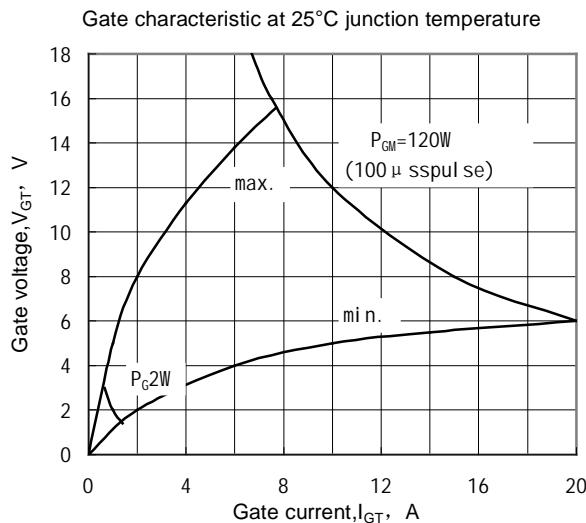


Fig.9

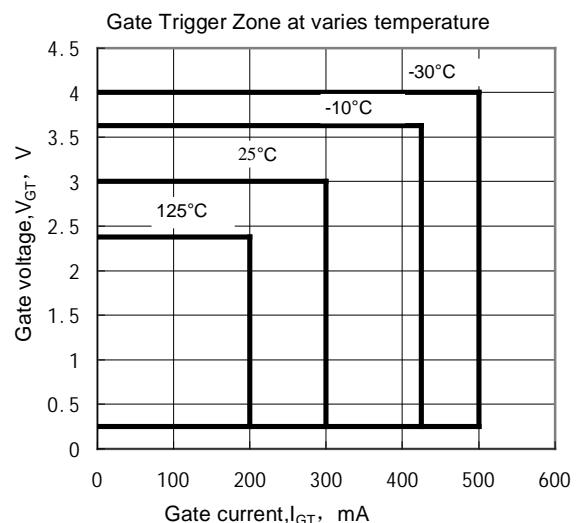


Fig.10

**Outline:**